

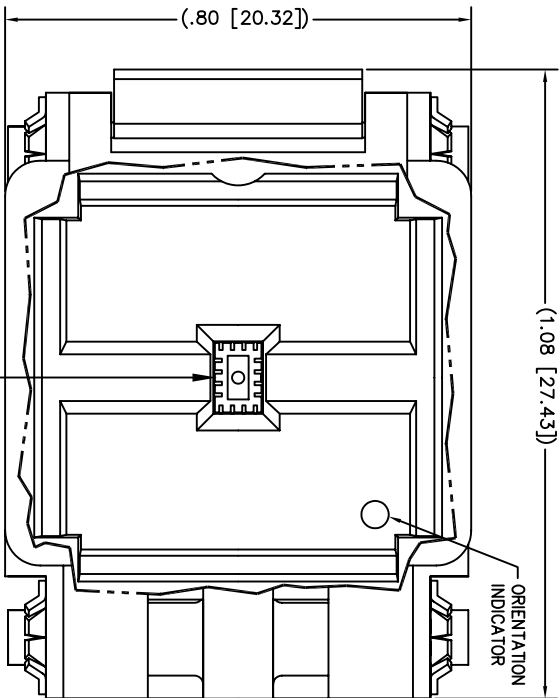



NOTE : * DIMENSIONS OF SOCKET FEATURES SHOWN. BOARD DESIGNER SHOULD SELECT APPROPRIATE HOLE SIZES TO PROVIDE A SLIP FIT FOR THESE FEATURES.

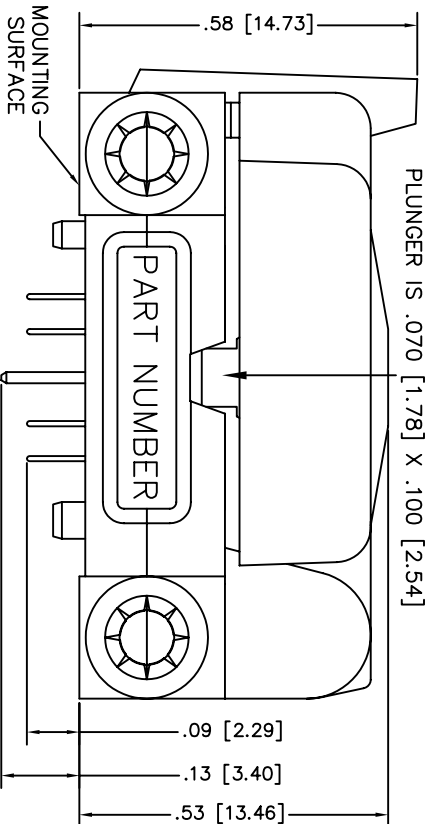

NEST SIZE AND CONTACT POSITIONS SHOWN; NON-FUNCTIONAL SURFACES FOR REPRESENTATION ONLY

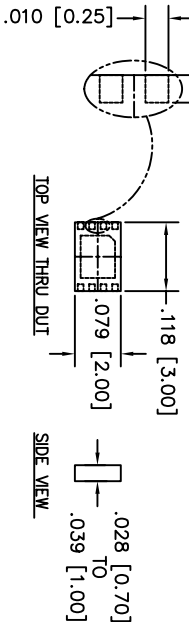

PLUNGER IS .070 [1.78] X .100 [2.54]

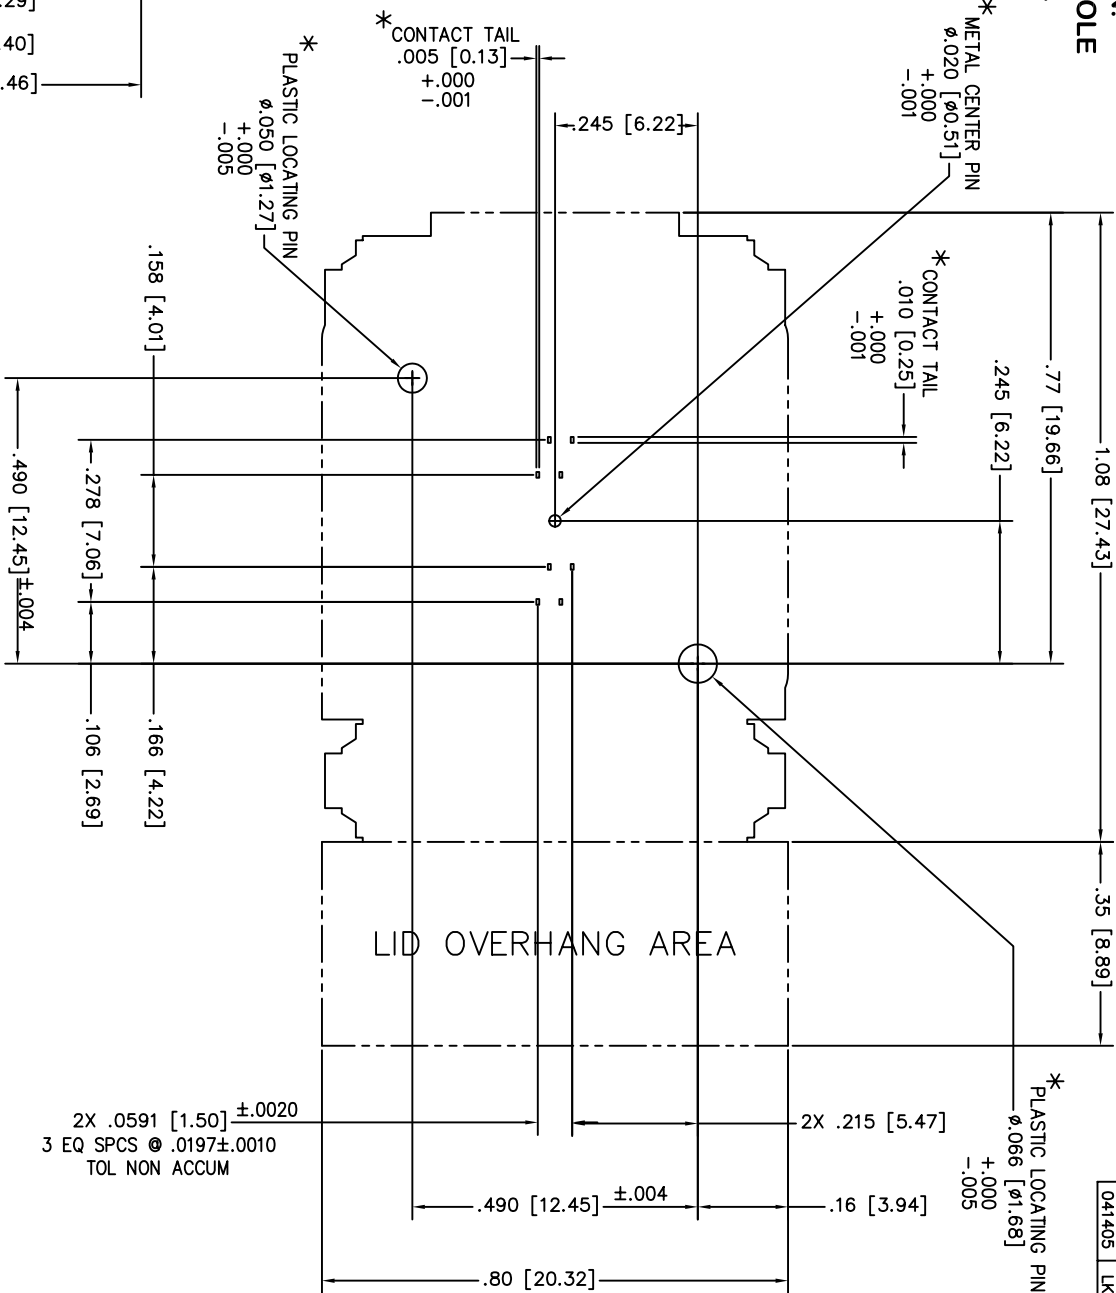

FOOTPRINT AS VIEWED FROM TOP OF SOCKET

PROPRIETARY

DEPOPULATED FROM :
16QN50T33020
PART NUMBER
08QN50T43020

UNLESS OTHERWISE SPECIFIED	SIZE	DWG NO.	SH
XXX = ±.003	C	08QN50T43020	1/1
XX = ±.010			
X = ±.020			
ANGLE = 45°			

ALL DIM ARE IN INCHES	SCALE	NONE	DATE
ALL DIM (X2) ARE MILLIMETERS	DWG	LKI	041405
REMOVE ALL BURS AND SHARP EDGES	CHK		
HOLE TOLERANCES	ENGR		
128 THRU 250 = +.005 - .001			
251 THRU 500 = +.008 - .001			
501 THRU 1000 = +.010 - .001			
1001 THRU 2000 = +.012 - .001			

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE. PLEASE REQUEST A CURRENT DRAWING WHEN LAYING OUT BOARDS.

FEATURES - T
= STANDARD
FOR 0.30mm LONG NOMINAL PAD

ASTRONOS 2601 TEXAS DRIVE IRVING, TX 75062

DATE	INT
041405	LKI