



REV.	DRG DATE	DESCRIPTION	DRAWN BY
1.0			

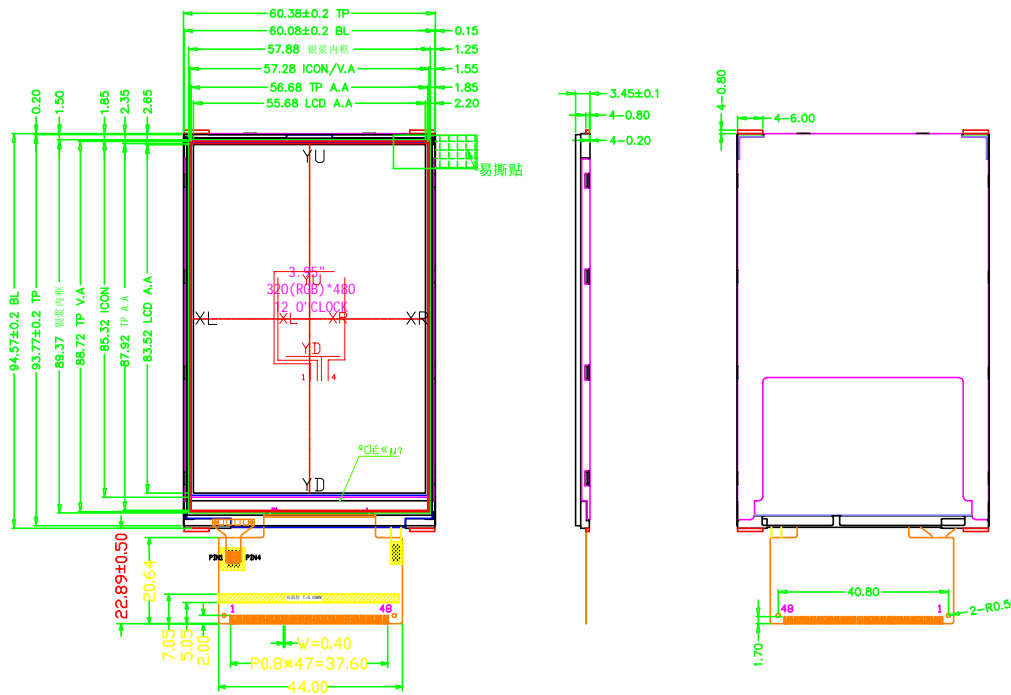

No	PIN NAME	No	PIN NAME
1	YU	25	DB10
2	XL	26	DB11
3	YD	27	DB12
4	XR	28	DB13
5	VDD	29	DB14
6	IDVCC	30	DB15
7	TE	31	DB16
8	CSX	32	DB17
9	DCX	33	GND
10	WRX/SCL	34	DEN
11	RD	35	PCLK
12	SDA	36	HSYNC
13	SDD	37	VSYNC
14	GND	38	RESET
15	DB0	39	IM2
16	DB1	40	IM1
17	DB2	41	IM0
18	DB3	42	LEDK
19	DB4	43	LEDK
20	DB5	44	LEDK
21	DB6	45	LEDK
22	DB7	46	LEDK
23	DB8	47	LEDK
24	DB9	48	LEDK

- NOTES:
1. DISPLAY TYPE: 3.95" TFT
 2. VIEWING DIRECTION: 12 0' CLOCK
 3. LCD DRIVE IC: ILI9488
 4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
 5. OPERATING TEMP: -10° C~+60° C
 6. STORAGE TEMP: -20° C~+70° C
 7. UNMARKER TOLERANCE: ±0.20
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



					DRG DATE	
					DRAWING	
TITLE.		REV.	UNIT	SIZE	CHECK	
MODEL.			mm	A4	APPROVE	

